


Medium-voltage disconnectors

Indoor and outdoor



FSO (24–36) kV

- Over head line (OHL) switch with arcing horns, arc quenching chamber or forced earthing
- Outdoor
- I_N : 630 A
- I_K : 60/24 kA

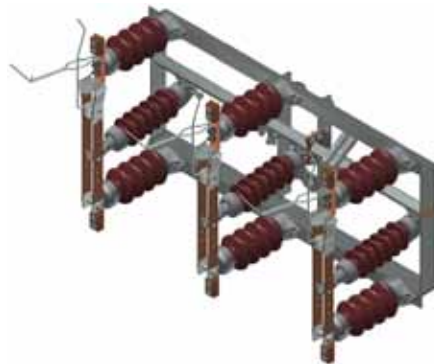


FSU (24–36) kV

- Branch switch with arcing horns, arc quenching chamber or forced earthing
- Outdoor
- I_N : 630 A
- I_K : 60/24 kA




FSM (24–36) kV

- Over head line (OHL) or branch switch with arcing horns or arc quenching chamber
- Outdoor
- I_N : 630 A
- I_K : 60/24 kA

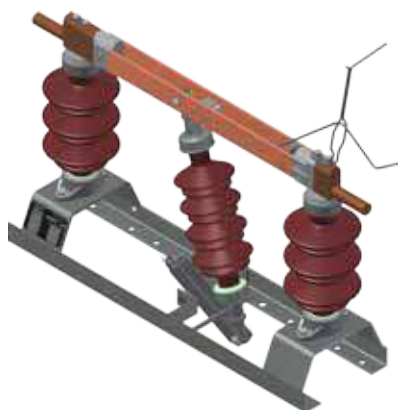

TFS (12–52) kV

- Vertical disconnector for railway applications with spark conductor
- Outdoor
- I_N : 630–3400 A
- I_K : 80/31.5 kA–100/40 kA

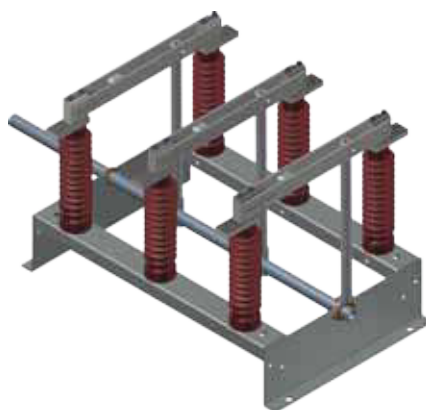

TIS (24–52) kV

- Vertical disconnector with or without integrated earthing switch
- Indoor
- I_N : 600–3400 A
- I_K : 80/31.5 kA–100/40 kA



EI (24–72.5) kV

- Earthing switch
- Indoor
- I_K : 80/31.5 kA–100/40 kA